

1400 RPM,  
FASTER  
THAN EVER

# FP862 NEW PNEUMATIC HAND SHEAR

FP862. The universal cutting tool for industry.



1946



### WHAT'S NEW:

New gears 1400 rpm  
 New housing coating for heat reducing  
 New soft-touch rubber handle  
 High manageability in 1100 g

### FOLLOW US:



**RASOR ELETTRMECCANICA SRL**

Via Vincenzo Caldesi 6 • 20161 Milan • Italy  
 ph. +39 02 66 22 12 31 • fax +39 02 66 22 12 93  
 info@rasor-cutters.com


www.rasor-cutters.com

# NEW PNEUMATIC HAND SHEAR FP862



### TECHNICAL DETAILS:

Muffled turbine motor with central back-located air exhaust  
 6 bar nominal\* ( $\pm 1$  bar) lubricated air supply  
**Air consumption:** 9 std liters/sec\*  
**Power:** 400 W at nominal air supply conditions  
**Blade:** 86 mm with hard metal counterblade  
**Blade descr.:** 86THSS, 86 mm dia., 8-edge, HSS steel  
**Blade speed:** 1400 r.p.m.\*  
**Cutting ability:** up to 25 mm  
**Sound pressure:** 72 dBe (EN ISO 15744)\*  
**Vibration Level:** 1,36 m/sec<sup>2</sup> (ISO 8662)\*  
**Net weight:** 1100 g  
**Total weight (with packing):** 1995 g  
**Temperature range:** 0 – 55 C  
**Umidity range:** 10 – 95% without condensate

*\*The reported data are collected at a pressure of 6 bar (ISO 2787: 1984), recommended operating pressure.*



minimum recommended

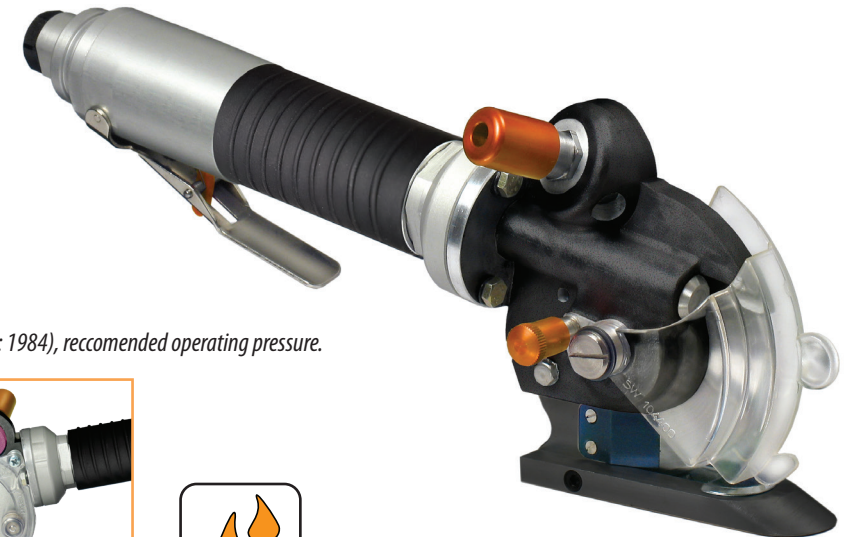

Rasor recommend to use only dry air lubricated with special Rasor VG 10 pneumatic oil



### BLADES AVAILABLE:

**86PHSS**, 86 mm 5-edges, HSS steel  
**86THSS**, 86 mm 8-edges, HSS steel  
**86PHSSTF**, 86 mm 5-edges, HSS steel Teflon® coated | **86THSSTF**, 86 mm 8-edges, HSS steel Teflon® coated | **86THSSTN**, 86 mm 8-edges, HSS steel Titanium coated | **86TMD**, 86 mm 8-edges, Carbide (Widia®)