CUTEX® EXTRA LARGE CUTTER (HOT & COLD)



WITH HOT & COLD COMBINATION KNIFE, YOU CAN CUT WIDE STRIP MATERIAL NEATLY.


Strip-tapes with max. 210mm wide can be cut at a range of 1mm ~ 100meter long.

SPECIAL FEATURES


- Cutting speed : It can cut 16~26 cuts per minute.(1m long)
- Accuracy : Cut-length is accurate owing to using a stepping motor.
- Cutting type : Cold cutting is neat due to using a cold cutter like scissors and blades are durable because they are made of high-speed steel(HSS).

With heater, knife can be heated up to max. 250°C, so fabric thread won't run out.

- Automatic operation : It works automatically only by setting length and quantity.
- Automatic stopper : It stops automatically if materials run out during operation.
- Memory : Set-length, set-q'ty & set-speed are not erased even if power off & on.




EASY TO USE & COMPACT DESIGN culex[®] MODEL: TBC-552L&H

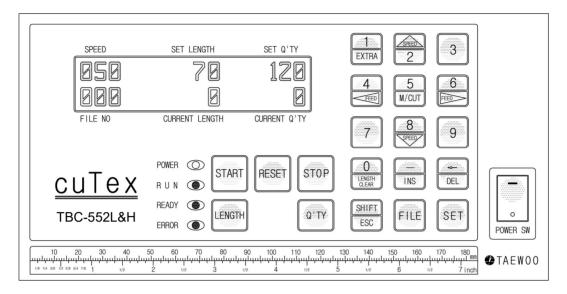


⊠ OPERATION

- LENGTH button + set-length + SET button
- Q'TY button + set-q'ty + SET button
- START button \rightarrow operation
- ※ Example : Length 70mm, Q'ty 120 cuts



⊠ KEY BOARD FUNCTION

- 5 Manual cutting, or to take out jammed material in M/CUT knife blades, or to fit blades in exchange of knife.
- 6 4 to move the roller forwards or backwards. FEED FEED
- 8 SPEED 2 speed up or down manually. - CUTTING SPEED : 16~26 cuts/min.
- LENGTH CLEAR to make the current length zero for operation.
- RESET to delete the current length and the current quantity.
- 1 to cut additional one. EXTRA
- Other various programming functions



ADDRESS: B-501, 234, DEOKSO-RO, WABU-EUP NAMYANGJU-SI, GYEONGGI-DO, KOREA (Postcode: 472-908) TEL.: +82 31 521-6904~7 FAX: +82 31 521-6908 E-mail: taewoo@cutex.co.kr Web : http://cutex.co.kr

⊠ AVAILABLE MATERIALS

Wide material, ribbon, cotton, Velcro[™], Film

⊠ SPECIFICATIONS

- CUTTING KNIFE : Cold & HOT (max. 250 °C)
- CUTTING WIDTH : 210mm (knife length:220mm)
- CUTTING LENGTH : 1mm ~ 100meter
- POWER SUPPLY : AC110/220V, 50/60Hz
- MACHINE/N.WT : 510×690×940/91kg
- PACKING/G.WT : 830×570×920/100kg

■ AGENT:		